

01/09/02

01-14-02

JC10 Rec'd PCT/PTO 09 JAN 2002



J0961 U.S. PTO

FORM PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE  
(REV 11-99)

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

ATTORNEY'S DOCKET NUMBER  
146-01

U.S. APPLICATION NO.  
(if known, see 37 CFR 1.5)

10/030976

INTERNATIONAL APPLICATION NO.  
PCT/AU00/00824

INTERNATIONAL FILING DATE  
7 July 2000 (07.07.00)

PRIORITY DATE CLAIMED  
9 July 1999 (09.07.99)

## TITLE OF INVENTION

PRIMER CASING AND METHOD OF CHARGING A BLASTHOLE

## APPLICANT(S) FOR DO/EO/US

THOMSON, Steven; PALMER, Anthony M. and HUNTER, Andrew D.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19<sup>th</sup> month from the earliest claimed priority date.
5. ☒ A copy of the International application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)):
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

## Items 11. To 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
  - ☐ A SECOND or SUBSEQUENT preliminary amendment
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: CERTIFICATE OF EXPRESS MAILING UNDER 37 C.F.R. §1.10

page 1 of 2

(January 1999)

U.S. APPLICATION NO (if known, see 37 CFR 1.5)	INTERNATIONAL APPLICATION NO	ATTORNEY'S DOCKET NUMBER
--	------------------------------	--------------------------

10030976-0510002

17. ☒ The following fees are submitted:  
**BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):**  
 Neither international preliminary examination fee (37 CFR 1.482)  
 nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
 and International Search Report not prepared by the EPO or JPO **\$1040.00**  
 International preliminary examination fee (37 CFR 1.482) not paid to  
 USPTO but International Search Report prepared by the EPO or JPO **\$890.00**  
 International preliminary examination fee (37 CFR 1.482) not paid to USPTO  
 but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$740.00**  
 International preliminary examination fee paid to USPTO (37 CFR 1.482)  
 but all claims did not satisfy provisions of PCT Article 33(1)-(4) **\$710.00**  
 International preliminary examination fee paid to USPTO (37 CFR 1.482)  
 and all claims satisfied provisions of PCT Article 33(1)-(4) **\$100.00**

**CALCULATIONS PTO USE ONLY**

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$1040.00

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30  
 months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total claims	36-20 =	16	X <b>\$18.00</b>	\$ 288.00	
Independent claims	1-3 =	-	X <b>\$78.00</b>	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ <b>\$260.00</b>	\$ 260.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$1588.00	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$	
<b>SUBTOTAL =</b>				\$1588.00	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +				\$	
<b>TOTAL NATIONAL FEE =</b>				\$1588.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +				\$	
<b>TOTAL FEES ENCLOSED =</b>				\$1588.00	
				<b>Amount to be: refunded</b>	\$
				<b>charged</b>	\$

- a. ☒ A check in the amount of **\$ 1588.00** to cover the above fees is enclosed.  
 b. ☐ Please charge my Deposit Account No. **07-1969** in the amount of \$\_\_\_\_\_ to cover the above fees.  
 c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit  
 Account No. **07-1969**. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must  
 be filed and granted to restore the application to pending status.

**SEND ALL CORRESPONDENCE TO:**

GREENLEE, WINNER and SULLIVAN, P.C.  
 5370 Manhattan Circle, Suite 201  
 Boulder, CO 80303  
 Phone: 303-499-8080  
 Fax: 303-499-8089

*Sally A Sullivan*  
 SIGNATURE

Name: SALLY A. SULLIVAN  
 Registration No.: 32,064

04-03-02

JC05 Rec'd PCT 01 APR 2002 PCT #5



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application of:

Thomson et al.

: Group Art Unit: Not assigned

Serial No.: 10/030,976

: Examiner: Not assigned

Filed: January 9, 2002

For: PRIMER CASING AND METHOD OF  
CHARGING A BLASTHOLE

CERTIFICATE OF MAILING	
I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as Express Mail in an envelope addressed to: Commissioner for Patents, Washington, D.C. 20231	
On	4/1/02 <i>L Murray</i> Lea Murray
EL 827 990 699 US	
Express Mail Certificate Number	

SECOND PRELIMINARY AMENDMENT

BOX NONFEE AMENDMENT  
Commissioner for Patents  
Washington, D.C. 20231

Sir:

Please amend the application as follows:

At page 1, lines 4, please insert the following:


--CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a National Stage Application of PCT International Application No. PCT/AU00/00824, filed July 7, 2000, which claims priority to Australian Patent Application No. PQ1533/99, filed July 9, 1999, both of which are incorporated by reference in their entirety, to the extent not inconsistent with the disclosure herein.--

10030976-051002

It is believed this submission does not require the payment of a fee. If this is incorrect, please deduct the required fee from deposit account 07-1969.

Respectfully submitted,

  
Sally A. Sullivan  
Reg. No. 32,064

Greenlee, Winner and Sullivan, P.C.  
5370 Manhattan Circle, Suite 201, Boulder, CO 80303  
Telephone: (303) 499-8080; Facsimile: (303) 499-8089  
Email: winner@greenwin.com  
Attorney docket no. 146-01  
SAS:lem:4/1/02

200750-9260001-10030976-054002

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Thomson et al.

Serial No.: Not assigned

Filed: January 4, 2002

For: PRIMER CASING AND METHOD  
 OF CHARGING A BLASTHOLE

:  
 : Group Art Unit: Not assigned  
 : Examiner: Not assigned

CERTIFICATE OF MAILING I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as Express Mail in an envelope addressed to: Commissioner for Patents, Washington, D.C. 20231 On: January 9, 2002 <i>Hina Reef</i> <b>EL571469572US</b> Express Mail Certificate Number	
---	--

PRELIMINARY AMENDMENT

BOX PCT  
 Commissioner for Patents  
 Washington, D.C. 20231

Sir:

This amendment accompanies the filing of a National Stage application under 35  
 U.S.C. 371.

Please amend the application as follows:

In the claims

Please replace claims 1-22 with new claims 23-42:

23. A primer casing comprising a sleeve portion and a leading portion, wherein  
 the sleeve portion is adapted to receive a primer and comprises a blasthole  
 engagement means, and wherein the leading portion comprises a nose cone  
 which is provided at one end and as an extension of the sleeve portion.
24. A casing according to claim 23, wherein the primer is in the form of a

10030976-051002

cylindrical cartridge.

25. A casing according to claim 23 or claim 24, wherein the sleeve portion defines a cylindrical passage into which the primer may be slidably inserted.
26. A casing according to claim 23, wherein the primer casing further comprises a primer retaining means.
27. A casing according to claim 23, wherein the apex of the nose cone is rounded.
28. A casing according to claim 23, wherein the blasthole engagement means comprises a projection from the sleeve portion.
29. A casing according to claim 23, wherein the blasthole engagement means is moveable between a retracted position and a blasthole engagement position.
30. A casing according to claim 29, wherein the blasthole engagement means is integral with the casing and attached thereto by a flexible hinge which enables movement between retracted and blasthole engagement positions.
31. A casing according to claim 29 or claim 30, wherein in the retracted position the blasthole engagement means abuts the sleeve portion.
32. A casing according to any of claims 29 to 31, wherein in the blasthole engagement position the projection is inclined outwardly relative to the primer casing and rearwardly relative to the leading portion.
33. A casing according to any of claims 29 to 31, wherein the projection comprises at its end a blasthole wall engagement means.
34. A casing according to claim 23, further comprising a loading hose engaging

means.

35. A casing according to claim 34, wherein the sleeve portion is adapted to engage the end of a loading hose.
36. A casing according to claim 35, wherein the sleeve portion adapted to engage the end of the loading hose has an internal dimension greater than the external dimension of the end of the loading hose.
37. A casing according to claim 35 or claim 36, further comprising means for preventing contact between the primer and loading hose when the loading hose is engaged by the sleeve portion.
38. A casing according to claim 23, comprising a number of apertures in the sleeve portion.
39. A method of loading a blasthole, which method comprises the steps of inserting a primer into a primer casing as claimed in any of claims 23, 24, 26, 27, 28, 29, 30, 34, 35, or 36 and positioning the primer casing at a desired location in the blasthole.
40. A method of loading a blasthole, which method comprises the steps of inserting a primer into a primer casing as claimed in claim 23, and positioning the primer casing at a desired location in the blasthole, wherein the primer casing is positioned using a loading hose.
41. A method of loading a blasthole, which method comprises the steps of inserting a primer into a primer casing as claimed in claim 23, positioning the primer casing at a desired location in the blasthole, and charging the blasthole with bulk explosive.

42. A method of loading a blasthole, which method comprises the steps of inserting a primer into a primer casing as claimed in claim 23, positioning the primer casing at a desired location in the blasthole using a loading hose, and charging the blasthole with bulk explosive.--

#### REMARKS

The claims of the international application have been replaced to correct formalities. Claims that were dependent upon multiply dependent claims have been replaced. This amendment is not intended to change the scope of the claims.

This amendment does not require the payment of additional fees. On amendment this case contains 20 claims of which 1 is independent and several are multiply dependent. For filing fee calculation the number of total claims are 36. The national filing fee of the accompanying national stage filing has been adjusted to include excess claims fees.

Respectfully submitted,



Sally A. Sullivan  
Reg. No. 32,064

Greenlee, Winner and Sullivan, P.C.  
5370 Manhattan Circle, Suite 201  
Boulder, CO 80303  
Telephone: (303) 499-8080; Facsimile: (303) 499-8089  
Email: winner@greenwin.com  
Attorney docket no. 146-01  
SAS:sas:1/9/02



Rec'd PCT/PTO 9 JAN 2002

- 1 -

**PRIMER CASING AND METHOD OF CHARGING A BLASTHOLE**

The present invention relates to a primer casing and to a method of charging a blasthole.

- 5 Some mining methods involve drilling long blastholes into rock from within a development drive, i.e. a tunnel. These blastholes may be up to 50 metres in length and vary in diameter. The blastholes typically radiate from the development drive vertically, horizontally and at any angle therebetween. The blastholes are filled with explosives which, when detonated, break the surrounding rock. In practice, each blasthole contains a
- 10 bulk explosive and an initiating explosive. The bulk explosive may be granular in nature, such as ANFO, or it may be an emulsion explosive. The initiating explosive typically consists of a primer and is responsible for detonation of the bulk explosive. The primer is typically a solid packaged explosive or an emulsion-based explosive in the form of a cartridge. When charging the blasthole the primer is positioned at a selected location or
- 15 locations and this is done by pushing the primer into position by use of a loading hose. The loading hose is also used to deliver the bulk explosive to the blasthole adjacent to the primer.

- Positioning of a primer at a desired location within a blasthole may be difficult due to
- 20 obstructions and/or discontinuities within the blasthole. For instance, when an explosion takes place in the vicinity of an uncharged blasthole, the blasthole walls are subjected to stresses. This can lead to distortion of the walls resulting in sections of the blasthole being non-aligned or off-set. In this case, it may be difficult or even impossible to push the primer along the blasthole to the desired location. This is because the primer is usually in
- 25 the form of a cylindrical cartridge having a leading surface which has a flat top and an acute edge. This kind of shape means that the primer is prone to snagging on obstructions and/or discontinuities in the blasthole as the primer is pushed into place. In this case the primer may not be positioned correctly and re-drilling of the blasthole may be required. This is time-consuming and uneconomic.

30

It is also important that the primer is retained in the blasthole in the desired position, and unwanted movement of the primer, for instance due to the effect of gravity or an

- 2 -

unauthorised attempt to withdraw the primer, should preferably be minimised or avoided. In the past, "spiders" in the form of a circular band having outwardly projecting rigid legs have been used for retaining a primer in the desired position in a blasthole. However, such "spiders" have generally been provided as separate articles which must be fixed to a primer  
5 at the blasthole or mine site. As well as this being time-consuming, the packaging and transportation of such "spiders" is inefficient due to their irregular shape and rigidity of the projecting legs.

The present invention seeks to address these problems by providing a primer casing which  
10 is adapted to receive a primer and to be positioned in a blasthole even when the blasthole contains obstructions and/or discontinuities. Furthermore, the primer casing of the present invention enables the primer to be retained at a desired location within the blasthole, irrespective of the orientation of the blasthole or any unauthorised attempt to withdraw the primer. The primer casing thus permits improved loading of a blasthole.

Accordingly, the present invention provides a primer casing comprising a sleeve portion and a leading portion, wherein the sleeve portion is adapted to receive a primer and comprises a blasthole engagement means, and wherein the leading portion comprises a nose cone which is provided at one end and as an extension of the sleeve portion.  
15

The sleeve portion of the primer casing is adapted to receive a primer and the exact construction of the sleeve portion will depend upon the shape and configuration of the primer. Typically however the primer is in the form of a cylindrical cartridge and the sleeve portion defines a cylindrical passage (or cavity) into which the primer cartridge may  
20 be slidably inserted. Other configurations for the sleeve portion are of course possible.

The passage of the sleeve portion is usually sized relative to the primer cartridge so that the cartridge is frictionally retained in the cavity or passage. However, in a preferred embodiment the primer casing is provided with means for retaining the primer within passage of the primer casing. The retaining means may be a tab, preferably a centre-  
30 hinged (reversible) tab, which is integral with the sleeve portion of the casing and which may be extended into the cavity after insertion of the primer to engage the primer body

10030976.001000

- 3 -

(which may be suitably adapted to be so-engaged) or to support the end of the primer. The effect is that the primer is retained in position within the sleeve portion of the primer casing.

- 5 The leading portion of the primer casing comprises a nose cone. The nose cone is provided at one end, and as an extension, of the sleeve portion of the casing. The nose cone is less prone to snagging on obstructions and/or discontinuities than a flat-ended construction. Typically, the apex of the nose cone is rounded. The nose cone is typically deflected by obstructions and/or discontinuities rather than being snagged on them. Thus, 10 the nose cone can assist in guiding the primer casing past and around obstructions and/or discontinuities in the blasthole.

In a preferred embodiment, the nose cone is hollow so that when, in place, the end of the primer does not contact the inside surface of the cone. In this embodiment the nose cone is 15 able to absorb shock which might otherwise be communicated to the primer when the primer casing impacts against an obstruction and/or discontinuity in, or the end of, a blasthole during positioning of the primer casing in the blasthole. This helps to avoid damage to the primer. Use of a hollow nose cone also provides a saving in materials cost.

- 20 The blasthole engagement means usually takes the form of a projection from the sleeve portion of the primer casing. In a preferred embodiment of the invention the blasthole engagement means is movable between a retracted position and a blasthole engagement position.

- In the retracted position the blasthole engagement means may abut the sleeve portion of 25 the casing. For example, in the retracted position the blasthole engagement means may be integral with the casing and attached thereto by a flexible hinge which enables the blasthole engagement means to be movable between the two positions. Alternatively, in the retracted position, the blasthole engagement means may be held adjacent to or within the casing, for example using retaining cord, wire or band. With the blasthole engagement 30 means in the retracted position the primer casing lends itself to being packed and transported in an economic manner.

- 4 -

In the blasthole engagement position, the projection is typically inclined outwardly relative to the primer casing and rearwardly relative to the leading portion. The projection is relatively rigid so that when it engages the wall of a blasthole little deflection of the projection takes place. If the projection does not have sufficient rigidity, it will not be able to function to maintain the primer casing in a desired position in a blasthole when the casing is subjected to forces which would otherwise cause withdrawal of the casing along and from the blasthole. Generally the primer casing is provided with at least two and preferably three or four such projections. The primer casing may comprise more than one array of multiple projections. When more than one projection is used, the projections will typically be of equal length. Usually, the projection comprises a leg portion.

The end of each projection may be provided with a wall engagement means which enables the projection to run over the surface of a blasthole wall as the primer casing is inserted into the blasthole, but which is capable of engaging the wall surface to assist in preventing unintentional withdrawal/movement of the primer casing. The wall engagement means may be a spike or prong which is capable of engaging the surface of a blasthole wall.

The blasthole engagement means may be moved from the retracted position to the blasthole engagement position at the mine site or blasthole so as to enable benefit to be derived from the ability to economically pack and transport the primer casings. Whilst the blasthole engagement means may be manually moved between retracted and blasthole engagement positions, it is preferred that insertion of the primer into the primer casing causes the blasthole engagement means to be so-moved. This may be possible for example when the blasthole engagement means is integral with the primer casing and a portion of the blasthole engagement means is provided within the sleeve portion of the primer casing which is adapted to receive the primer. In this arrangement insertion of the primer into the sleeve portion forces the blasthole engagement means outwardly and into the blasthole engagement position.

The blasthole engagement means may be integral with the primer casing, and preferably forms part of the sleeve portion thereof. In a preferred embodiment of the invention the sleeve portion and leading portion are integral components of a unitary piece. In this

- 5 -

embodiment, the entire assembly may be formed by injection moulding a plastics material using a single mould. Any plastics material may be used provided it imparts a desired level of rigidity to the casing. For instance, in order to prevent snagging, the nose cone of the casing should be sufficiently rigid to avoid undue deformation. If the nose cone is too easily deformed, it will not function in guiding the casing around or past obstructions and/or discontinuities in a blasthole wall. As described above, the blasthole engagement means should also exhibit a degree of rigidity in order to fulfil the desired function. As plastics which may be used, mention may be made of polyethylenes and polypropylenes.

- 10 The primer is usually in the form of a cylindrical cartridge having a rigid body. The cartridge is typically made of cardboard.

- In a preferred embodiment of the present invention, in use a primer is inserted into the primer casing and this causes the blasthole engagement means to move from the retracted position to the blasthole engagement position. The primer casing may then be inserted into a blasthole for initiation of an explosives charge. The blasthole engagement means enables the primer casing to be retained in position with the blasthole from the time of loading through to detonation. This is achieved by interaction between blasthole engagement means and the walls of the blasthole so as to substantially retain the position of the primer casing, and thus the primer, within the blasthole.

The primer is initiated by a signal tube. Conventional initiation means may be used. Thus, electric, non-electric or electronic initiation means may be employed.

- 25 Usually the primer casing may be loaded into a blasthole by using a loading hose. The end of the loading hose typically makes contact with the end of the primer casing remote from the nose cone of the leading portion. Problems can occur when the end of the loading hose and primer casing do not sit coaxially together when the primer casing is pushed into the blasthole. In this situation the loading hose may be displaced to one side and its leading edge may snag on the blasthole wall. To avoid this, in a preferred embodiment the primer casing is adapted to receive the end of a loading hose. This helps to prevent displacement of the loading hose from the desired point of contact with the primer casing. Thus, the

primer casing may preferably further comprise a loading hose engaging means such as a sleeve for receiving the primer. The loading hose engagement means may be an extension of the sleeve portion of the primer casing.

- 5 In one embodiment, the sleeve for engaging the end of the loading hose has an internal dimension slightly greater than the external dimension of the hose. The difference in dimension should be sufficient to accommodate a signal tube running from the end of the primer without damage to or abrasion of the tube. In this embodiment it is also preferred that the primer casing includes means for preventing contact between the end of the primer  
10 which is contained by the primer casing and the end of the loading hose. The primer casing may therefore include a tab (or tabs) which projects into the sleeve portion of the primer casing. To facilitate insertion of the primer it is preferred that the tab may be moved into a position in which it projects into the sleeve portion after the primer has been inserted into the casing. In a preferred embodiment the primer retaining means described  
15 above also serves to prevent contact between the primer and the loading hose.

- The loading hose serves to push the primer casing into the desired location within the blasthole. Bulk explosive is then pumped through the loading hose into the blasthole. It is desired that the bulk explosive is in intimate contact with the primer and preferably the  
20 primer is surrounded by bulk explosive. To this end the primer casing may include a number of apertures to enable bulk explosive to contact the primer. Preferably the sleeve portion include such cavities. The hose, when discharging bulk explosive, will separate from the primer casing and fill the blasthole with bulk explosive whilst being withdrawn from the blasthole. Bulk explosive may flow into any spaces between the blasthole wall  
25 and the primer casing and may contact the primer directly via the apertures in the casing.

- In a further aspect, the primer casing may be provided with connector means whereby a plurality of primer casings may be interconnected such that the leading primer casing which is positioned by the hose drags subsequent primer casings into the blasthole. The  
30 separation distance between primer casings may be determined by the length of the interconnection between the primer casings. In a preferred configuration the connector means may be an aperture at either end of the primer casing such that the primer casings

- 7 -

may be tied together with a length of signal tube, string, wire or the like. This kind of "train loading" is typically employed in larger diameter blastholes, for instance 89mm or 102mm. This greatly speeds up the loading process. It is possible to employ "train loading" in smaller diameter blastholes, say 76mm, but only if the walls thereof are relatively smooth. In this type of loading bulk explosive is pumped into the blasthole continuously as the loading hose is withdrawn from the blasthole thereby engulfing the primers.

Loading problems tend to be associated with smaller rather than larger diameter blastholes.

Thus, the present invention is typically employed in loading blastholes having a diameter of from about 70 to about 110mm, for instance 76mm, 89mm or 102mm in diameter.

In practice, the primer casing has an internal diameter of about 35mm. The diameter of the primer cartridge is slightly less than this. A primer casing of this internal diameter is typically used in conjunction with a loading hose having an external diameter of about 28mm. In this case the signal tube (diameter typically 3mm) is easily accommodated in the gap between the loading hose and the primer casing, the clearance being about 4mm. If a larger diameter loading hose is used, for instance, 32mm diameter, there signal tube may still just be accommodated.

20

The present invention further provides a method of loading a blasthole which comprises inserting a primer into a primer casing as described herein and positioning the primer casing at a desired location in the blasthole. Usually, the primer casing is positioned using a loading hose. After positioning of the primer casing, the blasthole is charged, usually via the loading hose, with bulk explosive.

25

The present invention further provides a method of loading a blasthole wherein a plurality of primers are positioned, spaced apart, in a blasthole wherein said plurality of primers are interconnected such that the positioning of the first primer will cause the subsequent primers to be positioned within said blasthole.

30

The present invention will now be further described with reference to the accompanying drawings. The drawings show primer casings which, when used with primers and initiating systems have been proven to initiate bulk explosives reliably. Figure 1 is a cut-away representation of a primer casing (1) in accordance with the present invention and shows also a primer cartridge (11) prior to insertion therein. Figure 2 is a cut away representation of a primer casing (1) having a primer inserted therein as well as the leading end of a loading hose (13). Figure 2 shows a primer casing (1) including a sleeve portion (5) and a leading portion (5a). Figure 3 is a side view of a primer casing (1). Figure 4 is a cross section through A-A shown in Figure 3. In Figures 1 and 3 the blasthole engagement means (2) are in the retracted position. In Figure 2 the blasthole engagement means are in the blasthole engagement position.

More specifically, Figure 1 shows a primer casing (1) having four blasthole engagement means (2) in the form of projecting legs, only three of which can be seen. Each of the legs incorporates an inward projection (3) formed by a bend in the leg. The legs (4) are integrally formed with the primer casing (1) and extend into the passage (4) defined by the sleeve portion (5). The passage (4) allows the legs to be retained within the sleeve portion (5) of the primer casing (1) for packaging and transportation. The legs are urged outwards on insertion of the primer (11) into the primer casing (1). The primer (11) is retained within the primer casing (1) in a position in which the blasthole engagement means (2) are urged outwards by the camming of inward projections (3) over the primer (11). The primer (11) is retained in this position by the over centre tabs (6) which may be depressed into a locking position as shown in Figure 2. The over centre tabs (6) also act to prevent the loading hose (13) from striking against the primer (11) and deforming the signal tube (12) which extends from the primer (11). The sleeve portion (5) extends to form a hose receiving sleeve (7). The top of the primer casing (1) includes a nose cone (8) in which there is provided apertures (9).

As illustrated in Figure 4 the over centre tabs (6) have flexible hinges, (6a, 6b and 6a). The hinges (6a) allow the over centre tab to be depressed inwardly and the central hinge (6b) permits the over centre tab to deform and stably retain a locked position.



An embodiment of the invention will now be described with reference to the following example.

Example

A series of blastholes (diameter 89mm and 102mm) were drilled in a formation. The formation was highly stressed and prone to movement. A number of blastholes were charged with bulk explosive and blasted. Surrounding uncharged blastholes were thus subjected to blast induced damage.

Attempts were made to load the uncharged blastholes with primer using a mechanical hose pusher. In one series of tests, attempts were made to load a cylindrical primer cartridge to which was attached a ring having leg-like blasthole engagements means (a "spider" as described herein). The leading end of the primer was flat and acute. In another series of tests, primer was inserted into a primer casing in accordance with the present invention.

Severe difficulties were encountered in the first series of loading tests. The primer became snagged in the blasthole and could not be fed using the mechanical hose pusher. In order to advance the primer along the blasthole it became necessary to twist and turn the loading hose as well as repeatedly moving the primer backwards and forwards. This manual manipulation is very time consuming and uneconomic. In certain instances the primer could not be positioned correctly, even with manual manipulation of the loading hose.

In contrast, no loading problems at all were encountered when using the primer casing in accordance with the present invention. The mechanical pusher was able to achieve insertion of the primer without difficulty, thereby avoiding the need for manual intervention.

Those skilled in the art will appreciate that the invention described herein is susceptible to variations and modifications other than those specifically described. It is to be understood

- 10 -

that the invention includes all such variations and modifications which fall within its spirit and scope. The invention also includes all of the steps, features, compositions and compounds referred to or indicated in this specification, individually or collectively, and any and all combinations of any two or more of said steps or features.

5

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

10

20050926.054002

- 11 -

**CLAIMS:**

1. A primer casing comprising a sleeve portion and a leading portion, wherein the sleeve portion is adapted to receive a primer and comprises a blasthole engagement means, and wherein the leading portion comprises a nose cone which is provided at one end and as an extension of the sleeve portion.
2. A casing according to claim 1, wherein the primer is in the form of a cylindrical cartridge.
3. A casing according to claim 1 or 2, wherein the sleeve portion defines a cylindrical passage into which the primer may be slidably inserted.
4. A casing according to any one of the preceding claims, wherein the primer casing further comprises a primer retaining means.
5. A casing according to any one of the preceding claims, wherein the apex of the nose cone is rounded.
6. A casing according to any one of the preceding claims, wherein the blasthole engagement means comprises a projection from the sleeve portion.
7. A casing according to any one of the preceding claims, wherein the blasthole engagement means is moveable between a retracted position and a blasthole engagement position.
8. A casing according to claim 7, wherein the blasthole engagement means is integral with the casing and attached thereto by a flexible hinge which enables movement between retracted and blasthole engagement positions.
9. A casing according to claim 7 or 8, wherein in the retracted position the blasthole engagement means abuts the sleeve portion.
10. A casing according to any one of claims 6 to 9, wherein in the blasthole engagement position the projection is inclined outwardly relative to the primer

AMENDED  
IPERIAL

- 12 -

casing and rearwardly relative to the leading portion.

11. A casing according to any one of claims 6 to 10, wherein the projection comprises at its end a blasthole wall engagement means.
12. A casing according to any one of the preceding claims, further comprising a loading hose engaging means.
13. A casing according to claim 12, wherein the sleeve portion is adapted to engage the end of a loading hose.
14. A casing according to claim 13, wherein the sleeve portion adapted to engage the end of the loading hose has an internal dimension greater than the external dimension of the end of the loading hose.
15. A casing according to claim 13 or 14, further comprising means for preventing contact between the primer and loading hose when the loading hose is engaged by the sleeve portion.
16. A casing according to any one of the preceding claims, comprising a number of apertures in the sleeve portion.
17. A method of loading a blasthole, which method comprises inserting a primer into a primer casing as claimed in any one of claims 1 to 16 and positioning the primer casing at a desired location in the blasthole.
18. A method according to claim 17, wherein the primer casing is positioned using a loading hose.
19. A method according to claim 17 or 18, further comprising charging the blasthole with bulk explosive.
20. A primer casing substantially as hereinbefore described.
21. A method of loading a blasthole substantially as hereinbefore described.

- 13 -

22. The steps and features disclosed herein or referred to or indicated in the specification and/or claims of this application, individually, collectively, and any and all combinations of any two or more of said steps or features.

DATED this 14<sup>th</sup> day of May, 2001

5 **Orica Australia Pty Ltd**

by DAVIES COLLISON CAVE  
Patent Attorneys for the Applicant(s)

10030976.054002

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number  
WO 01/04563 A1(51) International Patent Classification: F42B 3/103,  
F42D 1/22Explosives Technical Centre, George Booth Drive, Kurri  
Kurri, NSW 2327 (AU).

(21) International Application Number: PCT/AU00/00824

(74) Agents: HUNTSMAN, Peter, H. et al.; 1 Little Collins  
Street, Melbourne, VIC 3000 (AU).

(22) International Filing Date: 7 July 2000 (07.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: PQ 1533 9 July 1999 (09.07.1999) AU

(71) Applicant (for all designated States except US): ORICA  
AUSTRALIA PTY LTD [AU/AU]; 1 Nicholson Street,  
Melbourne, VIC 3000 (AU).

(72) Inventors; and


(75) Inventors/Applicants (for US only): THOMSON,  
Steven [AU/AU]; Orica Explosives Technical Centre,  
George Booth Drive, Kurri Kurri, NSW 2327 (AU).  
PALMER, Anthony, M. [AU/AU]; Orica Explosives  
Technical Centre, George Booth Drive, Kurri Kurri, NSW  
2327 (AU). HUNTER, Andrew, D. [AU/AU]; Orica(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance  
Notes on Codes and Abbreviations" appearing at the beginning  
of each regular issue of the PCT Gazette.

(54) Title: PRIMER CASING AND METHOD OF CHARGING A BLASTHOLE



(57) Abstract: Primer casing (1) comprising sleeve portion (5) and leading portion (5a), wherein sleeve portion (5) includes tabs (6) to retain primer (11) and blasthole engagement means (2), and wherein leading portion (5a) comprises nose cone (8). Engagement means (2) comprises an array of rigid, multiple projections that are hinged and movable between a retracted position and a blasthole engagement position. Explosive loading hose (13) locates within hose receiving sleeve (7) and can be used to push primer casing (1) into the desired location within the blasthole prior to filling the blasthole with bulk explosive. Methods of loading a blasthole comprising inserting primer (11) into primer casing (1) and positioning primer casing (1) at a desired location in a blasthole are also described and claimed.

WO 01/04563 A1

10/030976

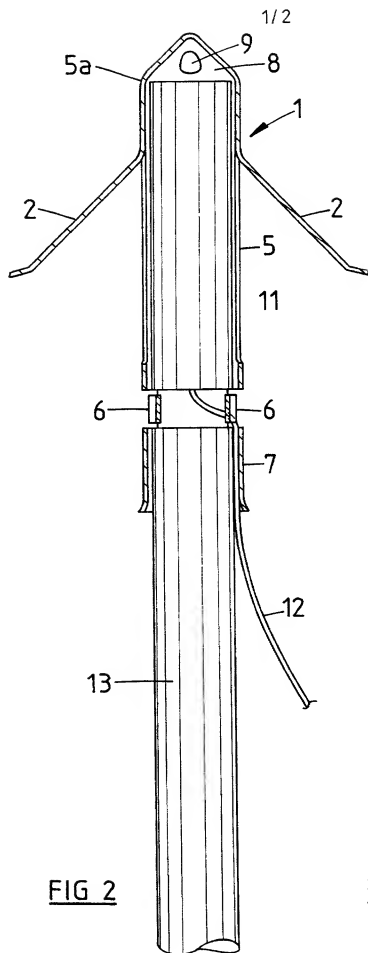


FIG 2



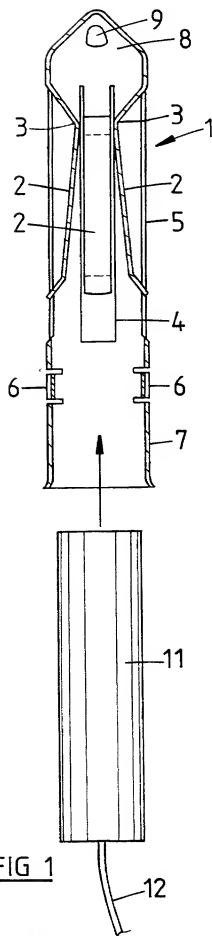


FIG 1

2/2

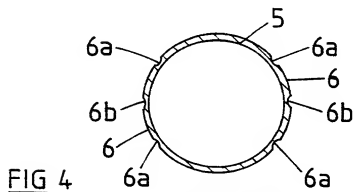

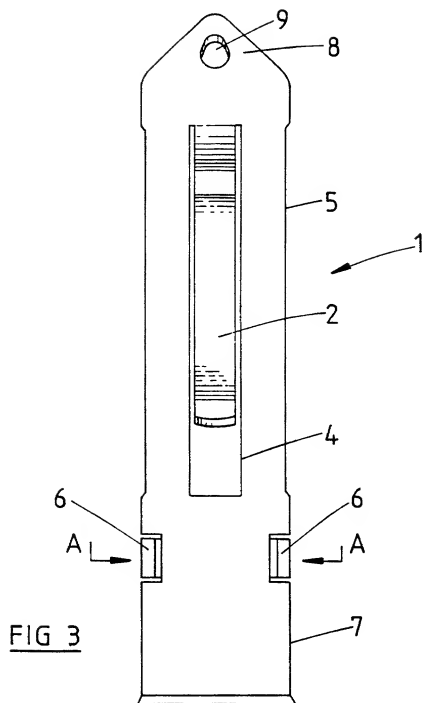

JOINT INVENTORS' DECLARATION FOR PATENT APPLICATION  
AND POWER OF ATTORNEY

As the below named inventors, we hereby declare that:

Our residences, post office addresses and citizenship are as stated below our names.

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled: PRIMER CASING AND METHOD OF CHARGING A BLASTHOLE.

the specification of which:

\_\_\_\_\_ is attached hereto;

X was filed on 07 July 2000 as PCT International Application No. PCT/AU00/00824.

We hereby authorize our legal representative to add reference to the Serial No. and/or filing date of the above-referenced application to this declaration.

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

Prior Foreign Application(s)

We hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application to which priority is claimed:

Country	Application No.	Date of Filing (day,month,year)	Date of Issue (day,month,year)	Priority Claimed 35 U.S.C.119
Australia	PQ1533-99	09 July 1999		Yes <u>X</u> No _____

### Prior Provisional Application(s)

We hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

Application Serial  
Number

Date of Filing  
(day, month, year)

### Prior U.S. Application(s) and PCT International Application(s) Designating the United States

We hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s), or § 365(c) of any PCT International application(s) designating the United States listed below:

Application Serial  
Number

Date of Filing  
(day, month, year)

Status  
(Patented, Pending, Abandoned)

Insofar as the subject matter of each of the claims in this application is not disclosed in the prior United States, foreign or PCT International application(s) to which priority has been claimed above in the manner provided by the first paragraph of Title 35, United States Code, §112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

We hereby appoint, both jointly and severally, as our attorneys and agents with full power of substitution and revocation, to prosecute this application and any corresponding application filed in the Patent Cooperation Treaty Receiving Office, and to transact all business in the Patent and Trademark Office connected herewith the following attorneys and agents, their registration numbers being listed after their names:

Sally A. Sullivan, Reg. No. 32,064; Lorance L. Greenlee, Reg. No. 27,894; Ellen P. Winner, Reg. No. 28,547; Donna M. Ferber, Reg. No. 33,878; G. William Van Cleave, Reg. No. 40,213; Susan K. Doughty, Reg. No. 43,595; Heeja Yoo-Warren, Reg. No. 45,495; Tamala R. Jonas, Reg. No. 47,688; Mary Beth Vellette, Reg. No. 47,903 and Jonathan A. Baker, Reg. No. 49,022 all of Greenlee, Winner and Sullivan, P.C., 5370 Manhattan Circle, Suite 201, Boulder, CO 80303.

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

(1) Full Name of

First Inventor:

**Steven THOMSON**

Residence:

Citizenship:

**Australia**

Post Office Address:

**Orica Explosives Technical Centre  
George Booth Drive  
Kurri Kurri, New South Wales 2327  
Australia**

(1) Signature

Date

19/2/02

(2) Full Name of

Second Inventor:

**~~Anthony M. PALMER~~**

Residence:

Citizenship:

**Australia**

Post Office Address:

**Orica Explosives Technical Centre  
George Booth Drive  
Kurri Kurri, New South Wales 2327  
Australia**

(2) Signature

Date

22/2/02

3W  
(3) Full Name of

Second Inventor:

Andrew D. HUNTER

Residence:

Citizenship:

Australia

Post Office Address:

~~Orica Explosives Technical Centre~~

~~George Booth Drive~~

~~Kurri Kurri, New South Wales 2327~~

~~Australia~~

ask  
90 SKY POINT ROAD

COAL POINT

NSW 2283

ANSTRALIA

Duf

(3) Signature

Andrew D. Hunter

Date

19/4/02

10030976-051002